



HAND FINISHED

3750 PSI CONCRETE

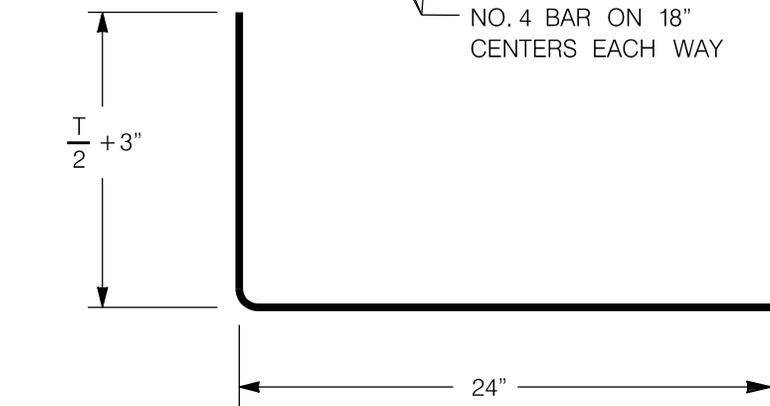

NO. 4 BAR ON 18"
CENTERS EACH WAY

SEE BAR DIMENSIONS
BELOW

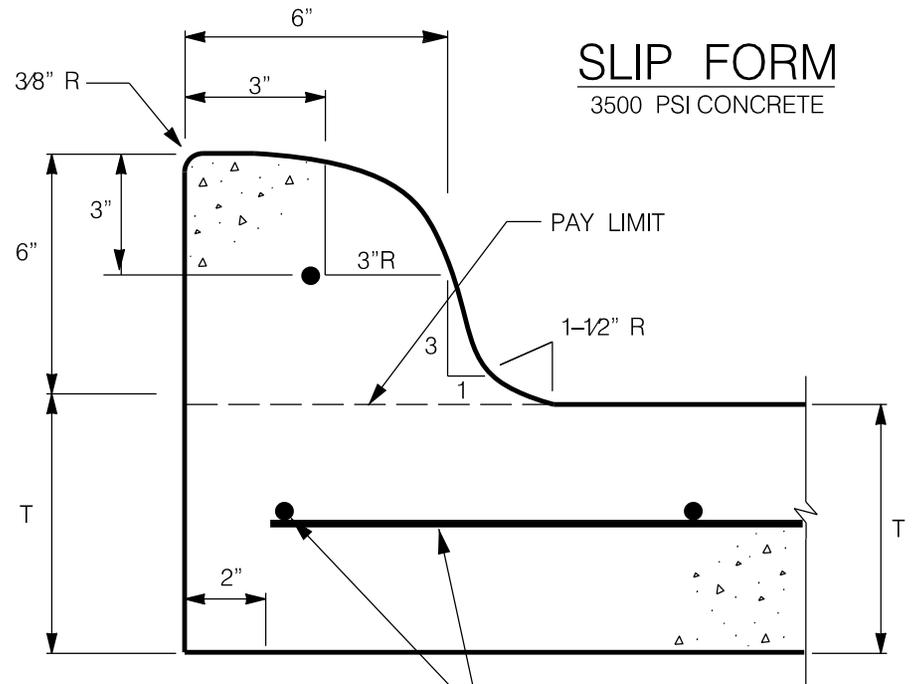


SLIP FORM

3500 PSI CONCRETE

NO. 4 BAR ON 18"
CENTERS EACH WAY

NOTE:
DETAIL SUBJECT TO CHANGE PER DIRECTION
OF CITY OF LEWISVILLE ENGINEERING DIVISION.



Standard Details

6" INTEGRAL CURB

Revisions:

No.	Description	Date

Engineering
Department

Office No. 972-219-3490

www.cityoflewisville.com

Dated: 8-13-07

Dated: 10-21-19

Sheet:

2.8