


STAMPED OR  
PATTERNED CONCRETE

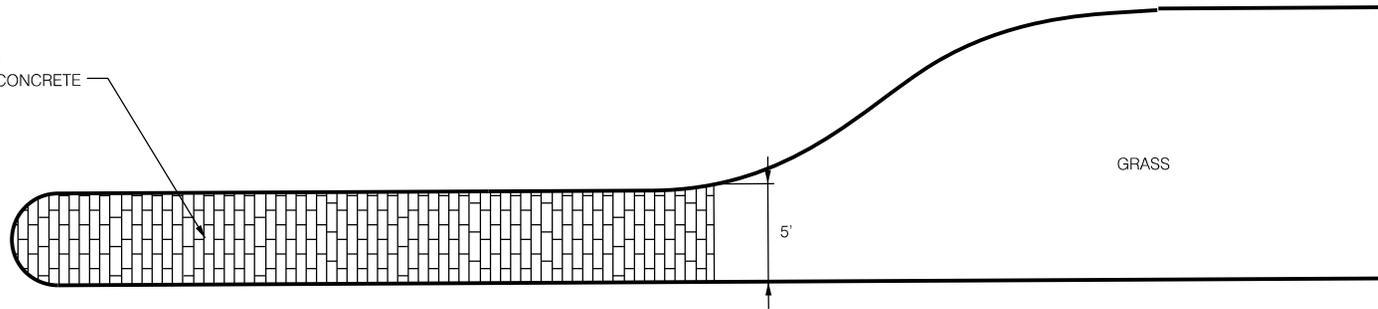


**STAMPED AND PATTERNED CONCRETE**

N.T.S.

MEDIAN PAVEMENT OF FIVE (5) FEET OR LESS SHALL RECEIVE A STAMPED AND PATTERNED SURFACE WITH COLORING IN ACCORDANCE WITH THE FOLLOWING:


1. IN ADDITION TO THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS, MEDIAN PAVEMENT SHALL BE IN ACCORDANCE WITH EITHER "PATTERNED CONCRETE INDUSTRIES, INC." OR "BOMINITE CORPORATION" SPECIFICATIONS. THIS INCLUDES THEIR REQUIREMENTS FOR EXPANSION JOINTS, JOINT FILLERBOARD, AND CONCRETE MIX.
2. STAMPED OR PATTERNED CONCRETE (IMPRINTED CONCRETE PAVING) SHALL BE INSTALLED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS OF EITHER "PATTERNED CONCRETE INDUSTRIES, INC." OR "BOMINITE CORPORATION". THE CONTRACTOR PERFORMING THE WORK MUST SUBMIT A LETTER FROM ONE OF THE ABOVE TOOLING MANUFACTURERS STATING THAT THE INSTALLER OF THE WORK IS TRAINED AND/OR LICENSED TO PERFORM THE SPECIFIED WORK.
3. MEDIAN PAVEMENT SHALL BE STAMPED AND PATTERNED TO ONE OF THE FOLLOWING:
  - a. PER "PATTERNED CONCRETE INDUSTRIES, INC."  
PATTERN: "RUNNING BOND COBBLE"  
COLOR: A-27 DARK RED
  - b. PER "BOMINITE CORPORATION"  
PATTERN: "RUNNING BOND COBBLESTONE"  
COLOR: B-15 COLONIAL RED

ALL WORK PERFORMED MUST BE OF THE SAME MANUFACTURER AND ALL MATERIALS USED, INCLUDING CONCRETE MIX, MUST BE THE SAME FOR THE ENTIRE PROJECT. COLOR HARDENERS AND RELEASE AGENTS AS RECOMMENDED BY THE TOOLING MANUFACTURER SHALL BE USED.

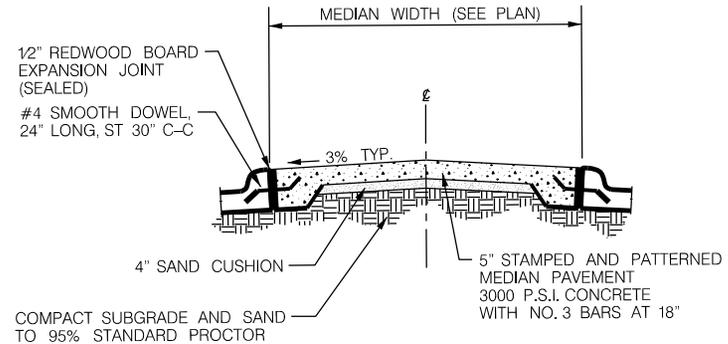

**TYPICAL MEDIAN PAVEMENT DETAIL**

N.T.S.

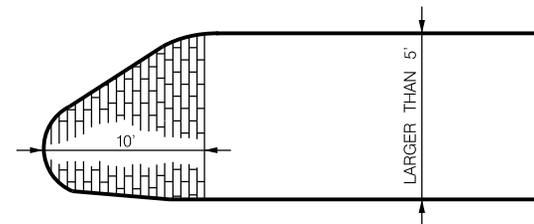

NOTE:  
DETAIL SUBJECT TO CHANGE PER DIRECTION  
OF CITY OF LEWISVILLE ENGINEERING DIVISION.



**Standard Details**  
**Stamped and Patterned Concrete**

**Revisions:**

No.	Description	Date

**Engineering  
Department**

Office No. 972-219-3490

www.cityoflewisville.com

Dated: 8-13-07

Dated: 10-23-19

Sheet:

**2.18**