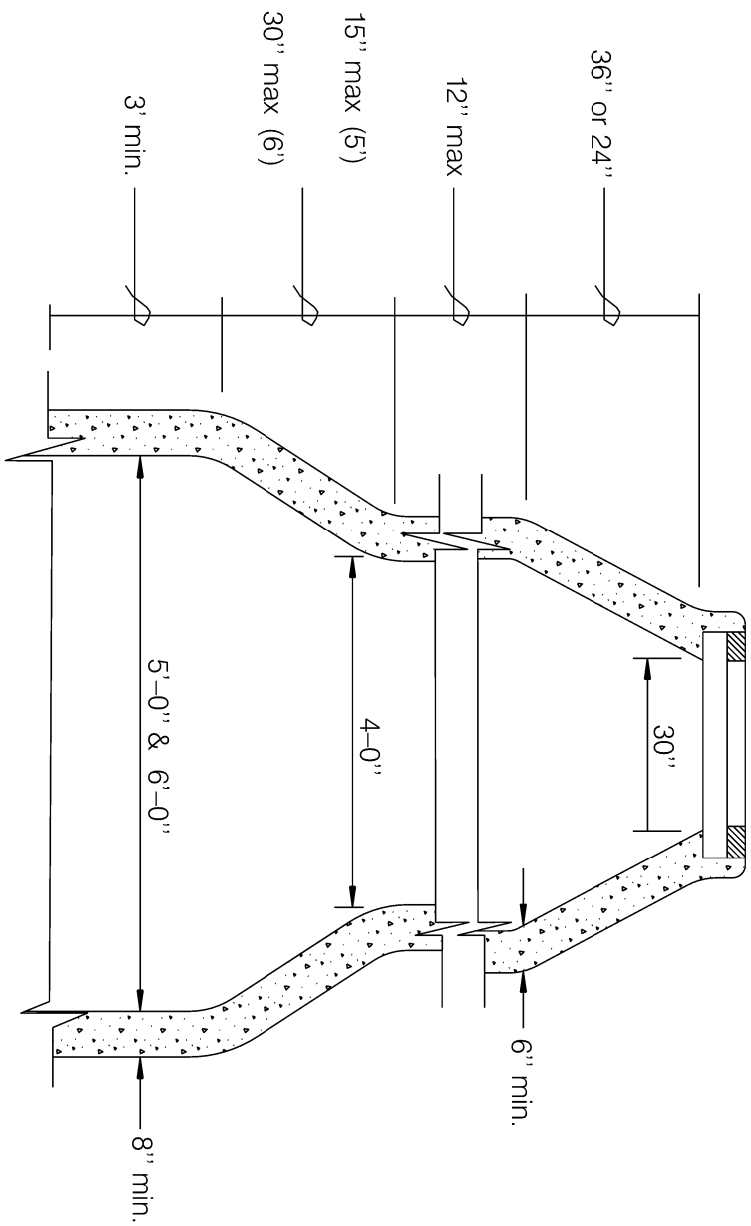

MANHOLE NOTES:

1. ALL SANITARY SEWER MANHOLES FOR SEWERS LARGER THAN 12''DIA.SHALL BE SPRAYED WITH THE FOLLOWING CORROSION RESISTANT COATING:RAVEN 405-100% SOLIDS,SOLVENT FREE ULTRA HIGH-BUILD EPOXY SYSTEM FROM RAVEN LINING SYSTEMS WITH A MINIMUM THICKNESS OF 125 MILS.

2. ALL MANHOLES SHALL BE PRECAST. NO CAST-IN-PLACE MANHOLES WILL BE ACCEPTED.

NOTE:
DETAIL SUBJECT TO CHANGE PER DIRECTION OF CITY OF LEWISVILLE ENGINEERING DIVISION.

LEWISVILLE
Deep Roots. Broad Wings. Bright Future.

Standard Details

Transition for 5' & 6' Manholes Detail

Revisions:

No.	Description	Date

Engineering Department

Office No. 972-219-3490

www.cityoflewisville.com

Dated: 4-27-10

Dated: 09-06-2019

Sheet: 7.7